


Lane Closure on a Two-Lane Road (Two Flagger Operation)

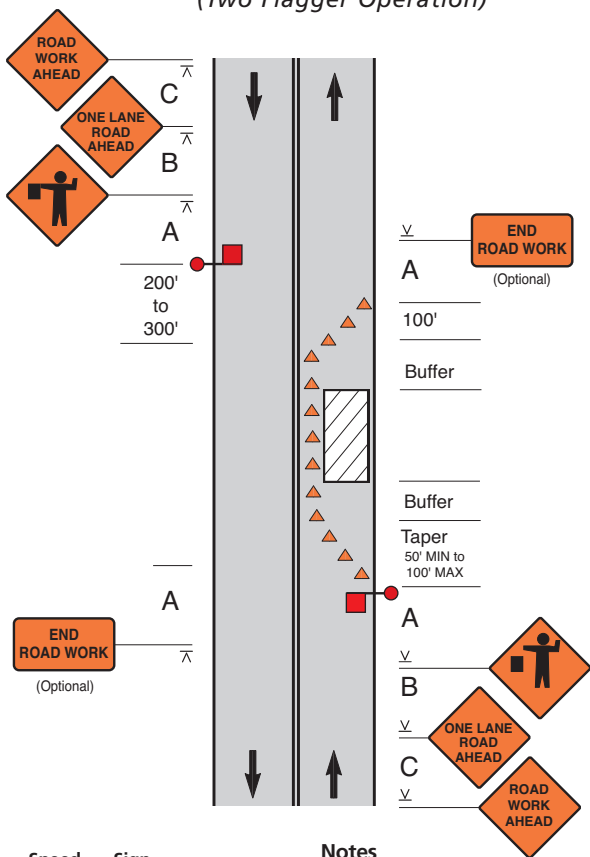

Speed Limit (mph)	Sign Spacing	
	A, B, C (ft)	Buffer (ft)
25	150	55
30	150	85
35	350	120
40	350	170
45	500	220
50	500	280
55	500	335

Notes

1. The flaggers shall use approved flagging procedures according to the MUTCD and as shown on page 23.
2. For short duration work (60 minutes or less), the ROAD WORK AHEAD sign may be omitted.