


Construction Fence

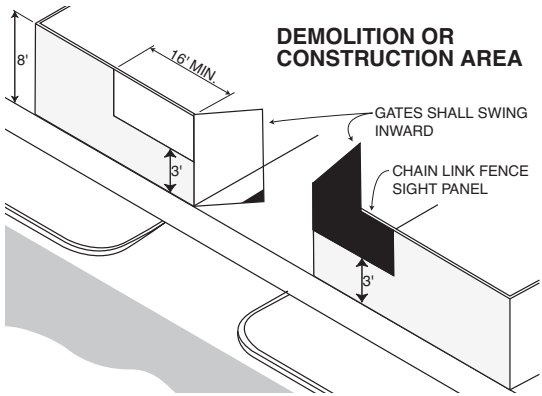

Notes

1. Only pedestrian traffic control is shown. Other devices may be needed to control vehicles.
2. Pedestrian protection normally required is as follows

HEIGHT OF CONSTRUCTION	DISTANCE FROM EDGE OF WALKWAY	PROTECTION REQUIRED
8 feet or less	Less than 6 feet	Railing
	6 feet or more	None
More than 8 Feet	Less than 6 feet	Fence and canopy
	6 feet or more but not more than 1/4 the height of construction	Fence and canopy
	6 feet or more, but between 1/4 to 1/2 the height of construction	Fence
	6 feet or more but exceeding 1/2 the construction height	None

- constructed of boards, plywood, or chainlink.
 - ramps provided for wheel chair use. Meet ADA requirements
 - where boards or plywood are used, 16-foot long chain link sight distance panels are required at vehicle entrances.
3. Construction fences at locations where the adjacent walkway has been closed to pedestrians may be completely constructed of chain link fencing.
 4. In those cases where the demolition work will take longer than one day to complete or three days to clear and level, in lieu of the requirements in the table above a 3-foot high chain link fence may be used, if authorized by the permitting agency