


Canopied Walkway at Mid-Block

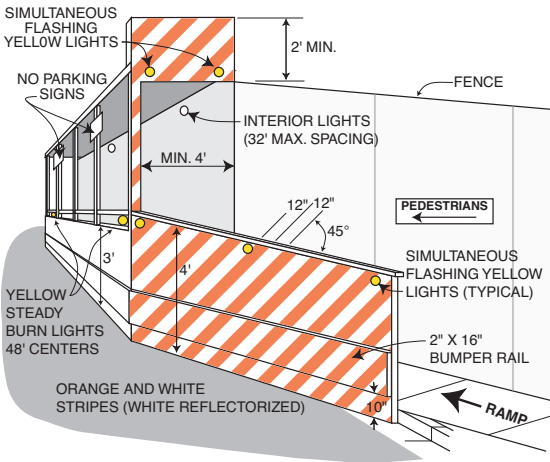

Notes

- Only pedestrian traffic control is shown. Other devices may be needed to control vehicles.
- Components of the walkway are as follows:
 - 4-feet wide walking area minimum
 - 8 feet wide walking area in heavily traveled pedestrian areas
 - 4-feet high railing on the street side between walkway entrances
 - 8-feet high clear walking height
 - Walking surface free of hazards (holes, debris, dust, mud, protruding nails, splinters, etc.)
 - Walking zone brightly illuminated from overhead with 60 or 100-watt electric lamps on a maximum of 32 feet intervals with electric hardwire circuit in conduit
 - 16-foot long chain link sight distance panels at vehicle entrances
 - Ramps provided for wheel chair use. Meet ADA slope requirements
- Do not transport materials aerially over a walkway unless walkway has been closed to pedestrian use. Prevent unsafe interference with pedestrian movement when transporting or moving materials or equipment across a walkway. Do not park vehicles across walkways